

EMC TEST REPORT

Certificate No. : TB200926511
Applicant : Heltec Automation Technology Co., Ltd
Equipment Under Test (EUT)
EUT Name : Heltec LoRa Gateway
Model No. : HT-M01
Series Model No. : HT-M02, HT-M02S
Brand Name : ----
Receipt Date : 2020-09-13
Test Date : 2020-09-14 to 2020-10-16
Issue Date : 2020-10-17
Standards : ETSI EN 301 489-1 V2.2.3: 2019
ETSI EN 301 489-3 V2.1.1: 2019
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above. The EUT technically complies with the Council Directive 2014/53/EU relating to radio equipment.

Test/Witness Engineer :

Engineer Supervisor :

Engineer Manager :



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

TABLE OF CONTENTS

1.	GENERAL INFORMATION	5
1.1	Client Information	5
1.2	General Description of EUT (Equipment Under Test)	5
1.3	Block Diagram Showing the Configuration of System Tested	6
1.4	Description of Support Units	6
1.5	Description of Operating Mode	6
1.6	Test Conditions	7
1.7	Performance Criterion	9
1.8	Test Facility	10
2	TEST RESULTS SUMMARY	11
3	TEST EQUIPMENT USED	12
4	CONDUCTED DISTURBANCE TEST	14
4.1	Test Standard and Limit	14
4.2	Test Setup	14
4.3	Test Procedure	15
4.4	Test Data	15
4.5	Deviation From Test Standard	15
5	CONDUCTED EMISSIONS(ASYMMETRIC MODE)	16
5.1	Test Standard and Limit	16
5.2	Test setup	16
5.3	Test Setup and Test Procedure	19
5.4	Deviation From Test Standard	19
5.5	Test Data	19
6	RADIATED DISTURBANCE TEST	20
6.1	Test Standard and Limit	20
6.2	Test Setup	21
6.3	Test Procedure	21
6.4	Deviation From Test Standard	21
6.5	Test Data	21
7	HARMONIC CURRENT EMISSION TEST	22
7.1	Test Standard and Limit	22
7.2	Test Setup	23
7.3	Test Procedure	23
7.4	Deviation From Test Standard	23
7.5	Test Data	23
8	VOLTAGE FLUCTUATION AND FLICKER TEST	24
8.1	Test Standard and Limit	24
8.2	Test Setup	24
8.3	Test Procedure	25
8.4	Deviation From Test Standard	25
8.5	Test Data	25
9	ELECTROSTATIC DISCHARGE IMMUNITY TEST	26
9.1	Test Requirements	26
9.2	Test Setup	26
9.3	Test Procedure	27
9.4	Deviation From Test Standard	27
9.5	Test Data	27
10	RADIATED ELECTROMAGNETIC FIELD IMMUNITY TEST	28

10.1	Test Requirements	28
10.2	Test Setup	28
10.3	Test Procedure	29
10.4	Deviation From Test Standard	29
10.5	Test Data	29
11	ELECTRICAL FAST TRANSIENT/BURST TEST	30
11.1	Test Requirements	30
11.2	Test Setup	30
11.3	Test Procedure	31
11.4	Deviation From Test Standard	31
11.5	Test Data	31
12	SURGE IMMUNITY TEST	32
12.1	Test Requirements	32
12.2	Test Setup	32
12.3	Test Procedure	33
12.4	Deviation From Test Standard	33
12.5	Test Data	33
13	RF COMMON MODE.....	34
13.1	Test Requirements	34
13.2	Test Setup	34
13.3	Test Procedure	35
13.4	Deviation From Test Standard	35
13.5	Test Data	35
14	VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST	36
14.1	Test Requirements	36
14.2	Test Setup	36
14.3	Test Procedure	36
14.4	Deviation From Test Standard	36
14.5	Test Data	36
15	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	37
16	PHOTOGRAPHS –TEST SETUP	39
	ATTACHMENT A--CONDUCTED EMISSION DATA.....	42
	ATTACHMENT B--RADIATED EMISSION TEST DATA	44
	ATTACHMENT C--ELECTROSTATIC DISCHARGE TEST DATA.....	48
	ATTACHMENT D--RF FIELD STRENGTH SUSCEPTIBILITY TEST DATA.....	50
	ATTACHMENT E--ELECTRICAL FAST TRANSIENT/BURST TEST DATA.....	51
	ATTACHMENT F-SURGE IMMUNITY TEST DATA	52
	ATTACHMENT G--CONDUCTED IMMUNITY TEST DATA.....	53
	ATTACHMENT H--VOLTAGE DIPS AND INTERRUPTIONS TEST DATA	54

Revision History

Report No.	Version	Description	Issued Date
TB-EMC175542	Rev.01	Initial issue of report	2020-10-17

1. General Information

1.1 Client Information

Applicant	:	Heltec Automation Technology Co., Ltd
Address	:	2-208, Block A, Yusha Building, 64 Hangtian Road, Longtan Industrial Park, Chenghua District, Chengdu, Sichuan, China
Manufacturer	:	Heltec Automation Technology Co., Ltd
Address	:	2-208, Block A, Yusha Building, 64 Hangtian Road, Longtan Industrial Park, Chenghua District, Chengdu, Sichuan, China


1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Heltec LoRa Gateway	
Model No.	:	HT-M01, HT-M02, HT-M02S	
Model Difference	:	The all model only difference of color.	
Product Description	:	Radio Parts Supported	LORA: 866.7-869.7MHz
Power Rating	:	USB Input:5V	
Software Version	:	V1.0	
Hardware Version	:	V2	
Connecting I/O Port(S)	:	Please refer to the User's Manual	
Remark	:	The antenna gain provided by the applicant, the adapter and verified for the RF conduction test and adapter provided by TOBY test lab.	

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) More information about the RF function, please refer the RF test reports.

1.3 Block Diagram Showing the Configuration of System Tested

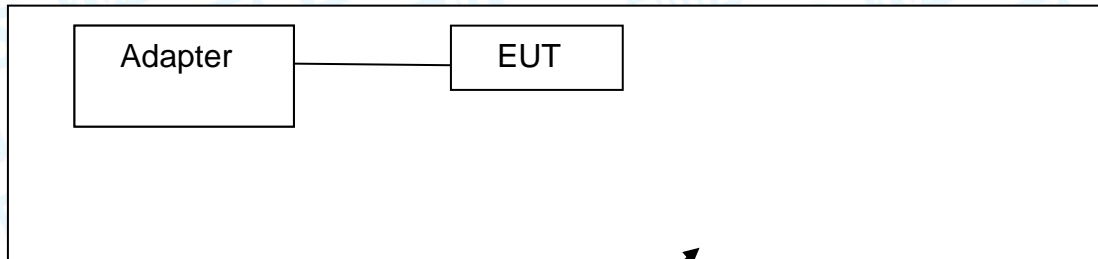

Control Room

1.4 Description of Support Units

Equipment Information				
Name	Model	S/N	Manufacturer	Used “√”
Adapter	----	----	BSY	√

1.5 Description of Operating Mode

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging+LORA Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as Following:

For EMI Test	
Final Test Mode	Description
Mode 1	Charging+LORA Mode
For EMS Test	
Final Test Mode	Description
Mode 1	Charging+LORA Mode

1.6 Test Conditions

For the purpose of the present document, the test conditions of EN 301 489-1[1], clause 4, shall apply as appropriate. Further product related test conditions for digital cellular mobile and portable radio equipment are specified in the present document.

(1) General

For emission and immunity tests the test modulation, test arrangements, etc., as specified in the present document, clauses 4.1 to 4.5, shall apply.

Whenever the Equipment Under Test (EUT) is provided with a detachable antenna, the EUT shall be tested with the antenna fitted in a manner typical of normal intended use, unless specified otherwise.

(2) Arrangements for test signals

The provisions of EN 301 489-1, clause 4.2 shall apply.

a. Arrangements for establishing a communications link

The nominal frequency of the wanted RF input signal (for the receivers) shall be selected by setting the Absolute Radio Frequency Channel Number (ARFCN) to an appropriate number (e.g. in case of GSM 900 MHz this is 60 to 65, and in case of GSM 1 800 MHz this is 690 to 706).

A communication link shall be set up with a suitable base station simulator.

When the EUT is required to be in the transmit/receive mode, the following conditions shall be met:

- the EUT shall be commanded to operate at maximum transmit power;
- the downlink RXQUAL shall be monitored.

b. Arrangements for test signals at the input of transmitters

The provisions of EN 301 489-1, clause 4.2.1 shall apply with the following modifications.

The test system shall command the EUT to disable Discontinuous Transmission (DTX).

A communication link shall be set up between the EUT and the test system.

c. Arrangements for test signals at the output of transmitters

The provisions of EN 301 489-1, clause 4.2.2 shall apply with the following modifications.

Where the equipment incorporates an external 50Ω RF antenna connector that is normally connected via a coaxial cable, then the wanted signal to establish a communication link shall be delivered from that connector by a coaxial cable.

Where the equipment incorporates an external 50Ω RF antenna connector, but this port is not normally connected via a coaxial cable, and where the equipment does not incorporate an external 50Ω RF connector (integral antenna equipment), then the wanted signal, to establish a communication link, shall be delivered from the equipment to an antenna located within the test environment.

d. Arrangements for test signals at the input of receivers

The provisions of EN 301 489-1, clause 4.2.3 shall apply with the following modifications.

Where the equipment incorporates an external 50Ω RF antenna connector that is normally connected via a coaxial cable, then the wanted signal to establish a communication link shall be delivered to that connector by a coaxial cable.

Where the equipment incorporates an external 50Ω RF antenna connector, but this port is not normally connected via a coaxial cable, and where the equipment does not incorporate an external 50Ω RF connector (integral antenna equipment), then the wanted signal, to establish a communication link, shall be presented to the equipment from an antenna located within the test environment.

The wanted RF input signal level shall be set to 40 dB above the reference sensitivity level.

e. Arrangements for test signals at the output of receivers

The provisions of EN 301 489-1, clause 4.2.4 shall apply.

f. Idle mode

When the EUT is required to be in the idle mode, the test system shall simulate a Base Station(BS) with Broadcast Control Channel/Common Control Channel (BCCH/CCCH) on one carrier. The EUT shall be synchronized to the BCCH, listening to the CCCH and able to respond to paging messages. Periodic Location Updating shall be disabled.

1.7 Performance Criterion

(1) ETSI EN 301 489-3

According to **ETSI EN 301 489-3** standard, the general performance criteria as following:

- performance criterion A applies for immunity tests with phenomena of a continuous nature;
- performance criterion B applies for immunity tests with phenomena of a transient nature.

NOTE: Whether a phenomenon is considered transient, continuous or otherwise is indicated in the test procedures for the phenomenon in ETSI EN 301 489-1 [1], clause 9.

Performance Requirements

Criterion	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

The Requirement of Performance Criteria

1	Performance criteria for continuous phenomena applied to transmitters (CT)	Criterion A of the applicable class shall apply
2	Performance criteria for transient phenomena applied to transmitters (TT)	Criterion B of the applicable class shall apply
3	Performance criteria for continuous phenomena applied to receivers (CR)	Criterion A of the applicable class shall apply
4	Performance criteria for transient phenomena applied to transmitters (TR)	Criterion B of the applicable class shall apply

(2) Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test	Parameters	Expanded Uncertainty (U_{Lab})	Expanded Uncertainty (U_{Cispr})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB	± 4.0 dB ± 3.6 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB	N/A
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB	± 5.2 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB	N/A
Mains Harmonic	Voltage	$\pm 3.11\%$	N/A
Voltage Fluctuations & Flicker	Voltage	$\pm 3.25\%$	N/A

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

2 Test Results Summary

Test procedures according to the technical standards:

Requirement Standard:		ETSI EN 301 489-1 V2.2.3: 2019 ETSI EN 301 489-3 V2.1.1: 2019		
EMC Emission				
Test Standard	Test Item	Limit	Judgment	Remark
EN 55032:2015	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	
EN61000-3-2:2014	Harmonic Current Emission	Class A or D NOTE(2)	N/A	NOTE(2)
EN 6000-3-3:2013	Voltage Fluctuations& Flicker		N/A	
EMC Immunity				
Test Standard	Test Item	Performance Criteria	Judgment	Remark
EN61000-4-2: 2009	Electrostatic Discharge	B	PASS	
EN 61000-4-3:2006 +A1:2008+A2:2010	RF electromagnetic field	A	PASS	
EN 61000-4-4:2012	Fast transients	B	PASS	
EN 61000-4-5:2014	Surges	B	PASS	
EN 61000-4-6: 2014	Injected Current	A	PASS	
EN 61000-4-11: 2004	Volt. Interruptions Volt. Dips	B /B/ C / C NOTE (3)	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The power consumption of EUT is less than 75W and no Limits apply.

(3) Voltage dip: 0% residual 0.5 cycle – Performance Criteria B

Voltage dip: 0% residual 1 cycle – Performance Criteria B

Voltage dip: 70% residual 25 cycles – Performance Criteria C

Voltage Interruption: 0% residual voltage 250 cycles – Performance Criteria C

3 Test Equipment Used

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 06, 2020	Jul. 05, 2021
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 06, 2020	Jul. 05, 2021
AMN	SCHWARZBEC K	NNBL 8226-2	8226-2/164	Jul. 06, 2020	Jul. 05, 2021
LISN	Rohde & Schwarz	ENV216	101131	Jul. 06, 2020	Jul. 05, 2021
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 06, 2020	Jul. 05, 2021
EMI Test Receiver	Rohde & Schwarz	ESCI	101165	Jul. 06, 2020	Jul. 05, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Pre-amplifier	HP	11909A	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.01, 2020	Feb. 28, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Harmonic Current and Voltage Fluctuation and Flicker Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
Harmonic Flicker Test System	CI	5001ix-CTS-400	100321	Jul. 13, 2019	Jul. 12, 2020
5K VA	CI	500IIX	59468	Jul. 13, 2019	Jul. 12, 2020

Discharge Immunity Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
ESD Tester	TESEQ	NSG437	304	Jul. 07, 2020	Jul. 06, 2021
Radiated Immunity Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
Vector Signal Generator	Agilent	E4438C	US44271917	Jul. 06, 2020	Jul. 05, 2021
Power meter	Agilent	E4419B	GB40202122	Jul. 06, 2020	Jul. 05, 2021
Power Sensor	Agilent	E9300A	MY41496625	Jul. 06, 2020	Jul. 05, 2021
Power Sensor	Agilent	E9300A	MY41496628	Jul. 06, 2020	Jul. 05, 2021
RF power Amplifier	OPHIR	5225R	1045	Jul. 06, 2020	Jul. 05, 2021
RF power Amplifier	OPHIR	5273R	1018	Jul. 06, 2020	Jul. 05, 2021
RF power Amplifier	SKET	HAP_0306G-50W	SK20140456	Jul. 06, 2020	Jul. 05, 2021
Antenna	SCHWARZBEC K	STLP9128E-special	STLP9128E s#139	Jul. 06, 2020	Jul. 05, 2021
Antenna	SCHWARZBEC K	STLP 9149	STLP 9149 #456	Jul. 06, 2020	Jul. 05, 2021
Electrical Fast Transient/ Surge/ Voltage Dip and Interruption Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
Simulator	EMTEST	UCS500N5	V0948105575	Jul. 06, 2020	Jul. 05, 2021
Auto-transformer	EMTEST	V4780S2	0109-41	Jul. 06, 2020	Jul. 05, 2021
Coupling Clamp	EMTEST	HFK	1109-04	Jul. 06, 2020	Jul. 05, 2021
Conducted Immunity Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
RF Generator	FRANKONIA	CIT-10/75	126B1126	Jul. 06, 2020	Jul. 05, 2021
Attenuator	FRANKONIA	59-6-33	A413	Jul. 06, 2020	Jul. 05, 2021
M-CDN	LUTHI	L-801 M2/M3	2599	Jul. 06, 2020	Jul. 05, 2021

Test Software			
Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Conducted Immunity	CIT	FRANKONIA	1.1.1
Electrical Fast Transient	lec.control	Nemtest	5.1.1.0
Surge	lec.control	Nemtest	5.1.1.0
Voltage Dip and Interruption	lec.control	Nemtest	5.1.1.0

4 Conducted Disturbance Test

4.1 Test Standard and Limit

4.1.1 Test Standard


ETSI EN 301 489-1 Clause 8.4
ETSI EN 301 489-3
EN55032: 2015 Class B

4.1.2 Test Limit

Conducted Disturbance Test Limit

Frequency	Maximum RF Line Voltage (Db μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50
Remark: *Decreasing linearly with logarithm of the frequency		

4.2 Test Setup

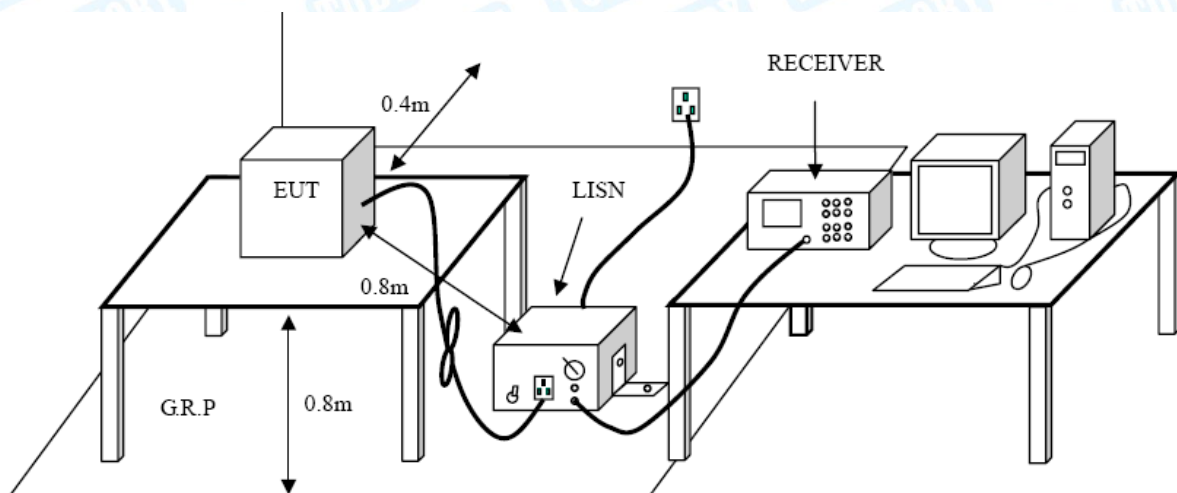

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from the nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


4.4 Test Data

Please refer to the Attachment A.


4.5. Deviation From Test Standard

No deviation

☐ Coupling device: CVP and Current probe (alternative method 2)

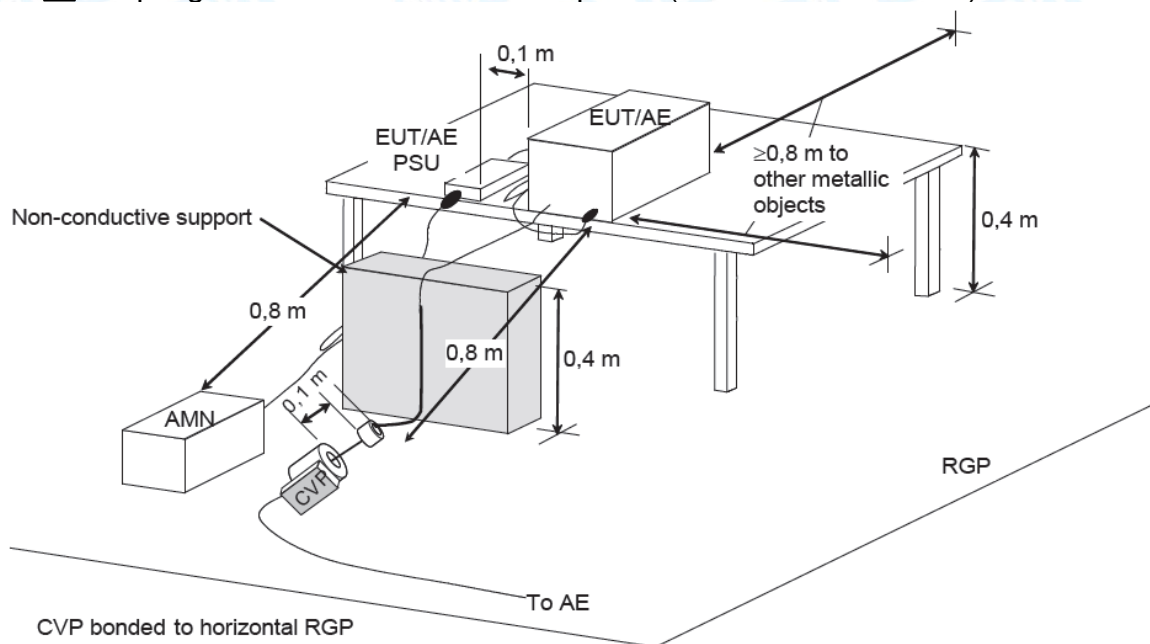

☐ Coupling device: Current probe / “150Ω to 50Ω adaptor” / high impedance probe (alternative method 1)

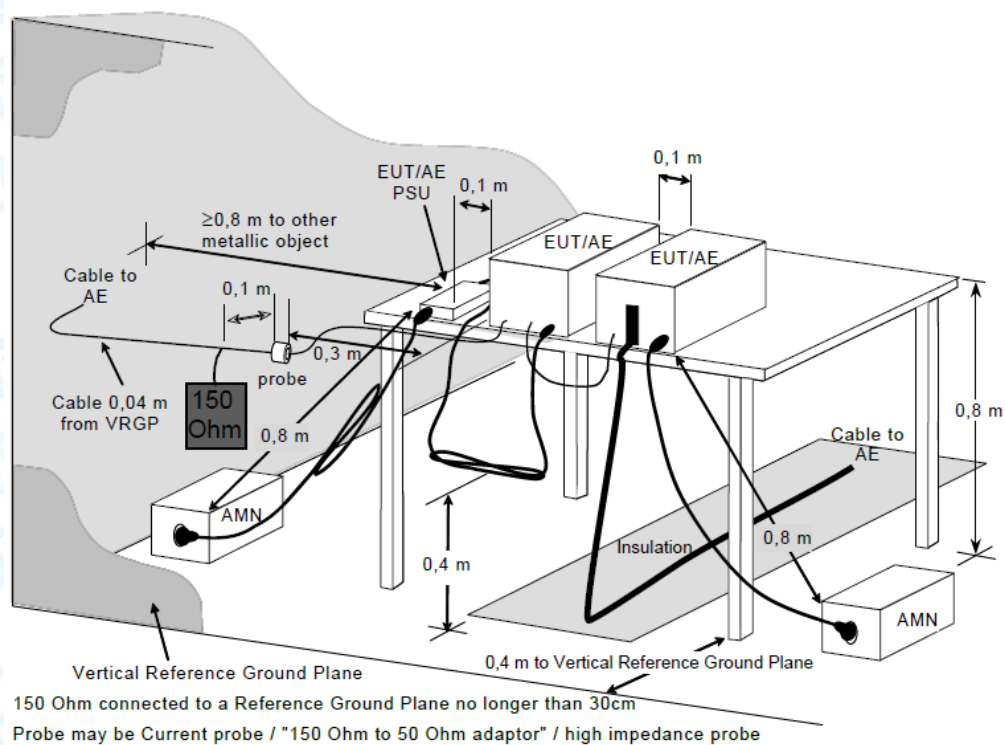

- TB-RF-075-1.0

5.3 Test Setup and Test Procedure

Detailed test procedure was following clause C.4.1 of EN 55032.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

Data Port	Measurement type	Coupling device	No. of Pairs
Balanced Unscreened	Voltage	AAN	≤ 4
Balanced Unscreened	Voltage and Current	CVP& Current probe	>4 or unable to AAN
Screened or Coaxial	Voltage	AAN	N/A
Screened or Coaxial	Voltage or Current	Current probe / “150Ω to50Ω adaptor” / high impedance probe	N/A
Unbalanced cables	Voltage and Current	CVP& Current probe	N/A

5.4 Deviation From Test Standard

No deviation

5.5 Test Data

No requirement for this test item

6 Radiated Disturbance Test

6.1 Test Standard and Limit

6.1.1 Test Standard

ETSI EN 301 489-1 Clause 8.2
ETSI EN 301 489-3
EN55032: 2015 Class B

6.1.2 Test Limit

Radiated Disturbance Test Limit

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	dBuV/m
30 – 230	40	30
230 – 1000	47	37

Notes:

- (1) The limit for radiated test was performed according to as following: EN55032
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Limits of Radiated Emission Measurement (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
1000-3000	76	56	70	50
3000-6000	80	60	74	54



Notes:

- (1) The lower limit applies at the transition frequency.

Frequency Range of Radiated Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 6 GHz, whichever is lower

6.2 Test Setup

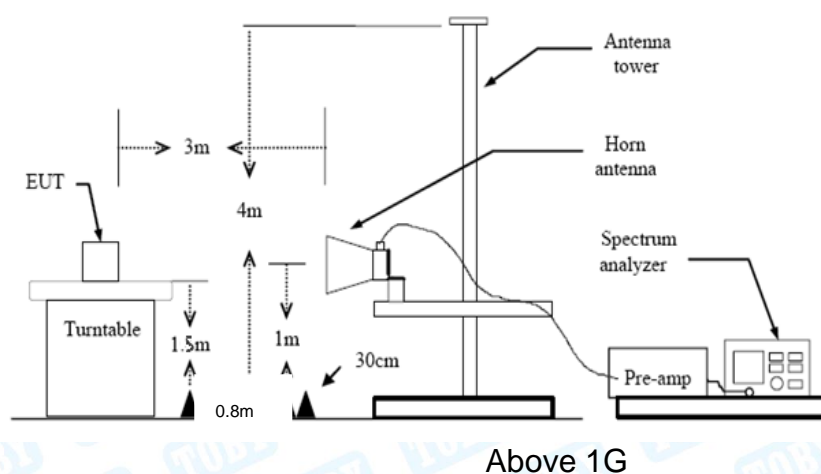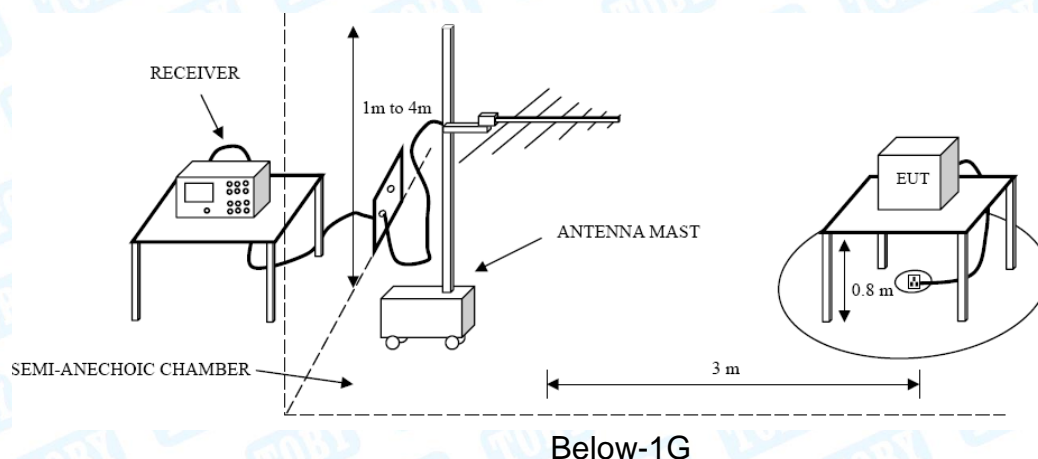

6.3 Test Procedure

The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m. The table was rotated 360 degrees to determine the position of the highest radiation.

The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

The initial step in collecting radiated emission data is a spectrum QuasiPeak detector mode scanning the measurement frequency range.

If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

6.4 Deviation From Test Standard

No deviation

6.5 Test Data

Please refer to the Attachment B.

7 Harmonic Current Emission Test

7.1 Test Standard and Limit

7.1.1 Test Standard


ETSI EN 301 489-1 Clause 8.5
ETSI EN 301 489-3
EN 61000-3-2

7.1.2 Limits

IEC 555-2					
Table- I			Table- II		
Equipment Category	Harmonic order n	Max. permissible harmonic current (in Amperes)	Equipment Category	Harmonic order n	Max. permissible harmonic current (in Amperes)
NonPortable Tools or TV Receivers	odd harmonics		TV Receivers	odd harmonics	
	3	2.30		3	0.8
	5	1.14		5	0.65
	7	0.77		7	0.45
	9	0.40		9	0.30
	11	0.33		11	0.17
	13	0.21		13	0.12
	15≤n≤39	0.15·15/n		15≤n≤39	0.10·15/n
	even harmonics			even harmonics	
	2	1.08		2	0.30
	4	0.43		4	0.15
	8	0.30			
	8≤n≤40	0.23·8/n		DC	0.05

EN 61000-3-2					
Equipment Category	Max. permissible harmonic current (in Amperes)	Equipment Category	Harmonic order n	Max. permissible harmonic current (in A) (mA/w)	
Class A	Same as Limits Specified in Table I But only odd Harmonics required	Class D	3	2.30	3.4
			5	1.14	1.9
			7	0.77	1.0
			9	0.40	0.5
			11	0.33	0.35
			8≤n≤40	See Tabel I	3.85/n
			Only odd harmonics required		

7.2 Test Setup

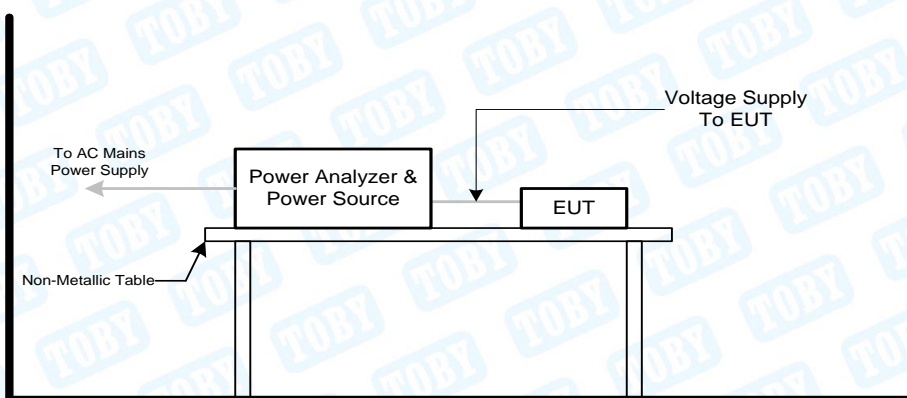

7.3 Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.

The classification of EUT is according to section 5 of EN 61000-3-2. The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools. Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.

Class D: Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors and television receivers.

7.4 Deviation From Test Standard

No deviation

7.5 Test Data

No requirement for this test item.

8 Voltage Fluctuation and Flicker Test

8.1 Test Standard and Limit

8.1.1 Test Standard


ETSI EN 301 489-1 Clause 8.4
ETSI EN 301 489-3
EN 61000-3-3

8.1.2 Limit

Flicker Test Limit

Tests	Limits		Descriptions
	IEC555-3	IEC 61000-3-3	
Pst	≤ 1.0 , $T_p = 10$ min.	≤ 1.0 , $T_p = 10$ min.	Short Term Flicker Indicator
Plt	N/A	≤ 0.65 , $T_p = 2$ hr.	Long Term Flicker Indicator
dc	$\leq 3\%$	$\leq 3\%$	Relative Steady-State V-Change
dmax	$\leq 4\%$	$\leq 4\%$	Maximum Relative V-change
d(t)	N/A	$\leq 3\%$ for > 200 ms	Relative V-change characteristic

8.2 Test Setup

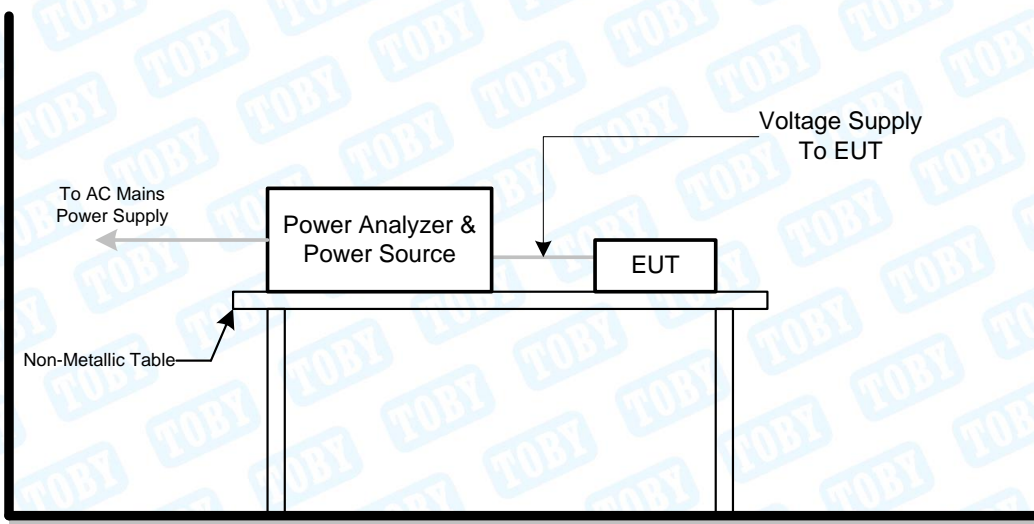

8.3 Test Procedure

8.3.1 Fluctuation and Flickers Test:

Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 5.0/6.0 of IEC555-3 and/or Clause 6.0/4.0 of IEC/EN 61000-3-3 depend on which standard adopted for compliance measurement.

8.3.2 All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

8.3.3 For the actual test configuration, please refer to the related Item –Block Diagram of system tested.

8.4 Deviation From Test Standard

No deviation

8.5 Test Data

No requirement for this test item.

9 Electrostatic Discharge Immunity Test

9.1 Test Requirements

9.1.1 Test Standard


ETSI EN 301 489-1 Clause 9.3
ETSI EN 301 489-3
EN 61000-4-2

9.1.2 Test Level

Discharge Impedance:	330 ohm/ 150pF
Discharge Voltage:	Air Discharge: 2kV/4kV/8kV(Direct) Contact Discharge: 2kV/4kV (Direct /Indirect)
Polarity:	Positive& Negative
Number of Discharge:	Air Discharge: min.20 times at each test point Contact Discharge: min.200 times in total
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

9.1.3 Performance criterion: B

9.2 Test Setup

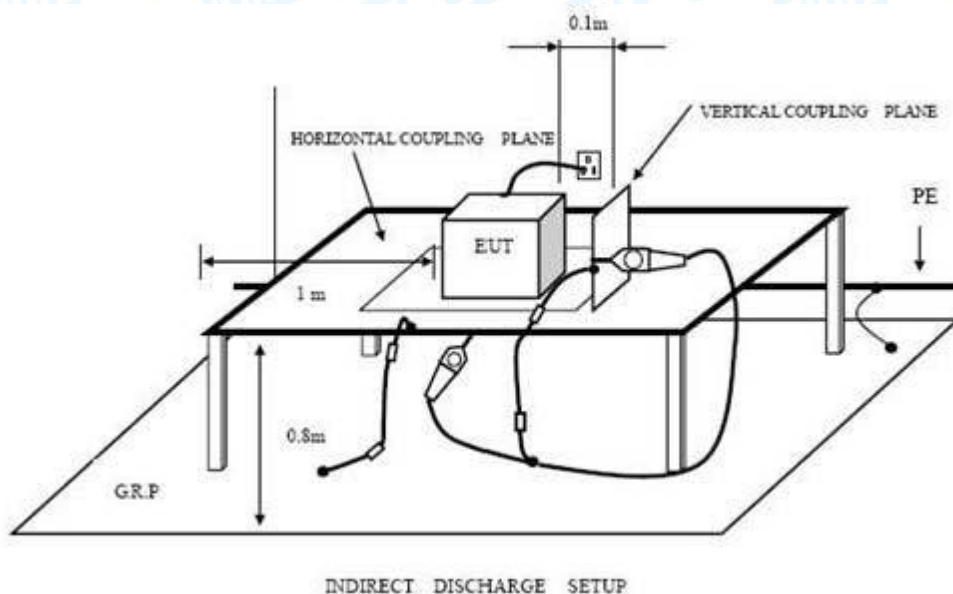

9.3 Test Procedure

9.3.1 Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

9.3.2 Contact Discharge:

All the procedure shall be same as air discharge. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

9.3.3 Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

9.3.4 Indirect discharge for vertical coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.4 Deviation From Test Standard

No deviation

9.5 Test Data

Please refer to the Attachment C.

TB-RF-075-1.0

10.3 Test Procedure

The EUT are placed on a table, which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna, which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna is set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a camera is used to monitor its screen.

All the scanning conditions are as following:

Condition of Test	Remark
Fielded Strength	3V/m
Radiated Signal	80%AM,1kHz Since Wave
Scanning Frequency	80-6000MHz
Sweep time of radiated	0.0015 Decade/s
Dwell Time	3 Sec.

10.4 Deviation From Test Standard

No deviation

10.5 Test Data

Please refer to the Attachment D.

11 Electrical Fast Transient/Burst Test

11.1 Test Requirements

11.1.1 Test Standard

ETSI EN 301 489-1 Clause 9.4
ETSI EN 301 489-3
EN 61000-4-4


11.1.2 Test Level

Test Level for Electrical Fast Transient Test

	On Switching Adapter Lines	On I/O (Input/Output) Signal data and control lines
Test Voltage:	1 KV	0.5 KV
Polarity:	Positive&Negative	
Impulse Wave Shape:	5/50ns	
Burst Duration:	15ms	
Burst Period:	300ms	
Test Duration:	Not less than 1 min	

11.1.3 Performance criterion: B

11.2 Test Setup

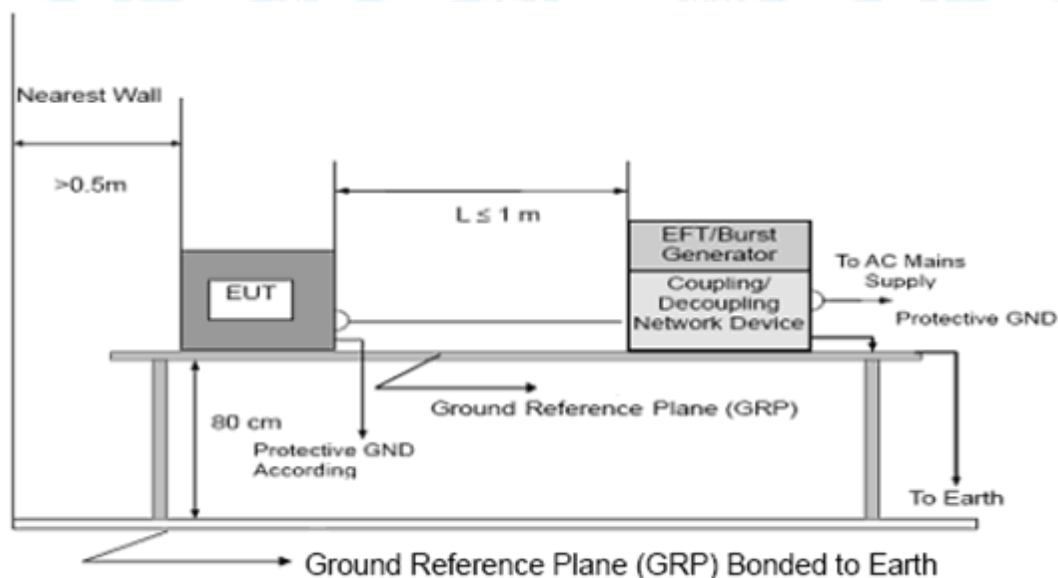

11.3 Test Procedure

11.3.1 For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 1 minute.

11.3.2 For signal lines and control lines ports:

A coupling clamp is use to couple the EFT interference signal to the signal and control lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 1 minute.

11.3.3 For DC input and DC output power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to DC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 1 minute.

11.4 Deviation From Test Standard

No deviation

11.5 Test Data

Please refer to the Attachment E.

12 Surge Immunity Test

12.1 Test Requirements

12.1.1 Test Standard

ETSI EN 301 489-1 Clause 9.8

ETSI EN 301 489-3

EN 61000-4-5


12.1.2 Level

Test Level for Surge Immunity Test

Basic Standard:	EN 61000-4-5
Wave-Shape:	Combination Wave 1.2/50us Open Circuit Voltage 8/20us Short Circuit Current
Test Voltage	Power Line:0.5kV,1kV,2kV
Surge Input/Output:	L1-L2,L1-PE,L2-PE
Generator Source:	2 ohm between networks
Impedance:	12ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0/90/180/270
Pulse Repetition Rate:	1 time/min.(maximum)
Number of Tests:	5 positive and 5 negative at selected points

12.1.3 Performance criterion: B

12.2 Test Setup

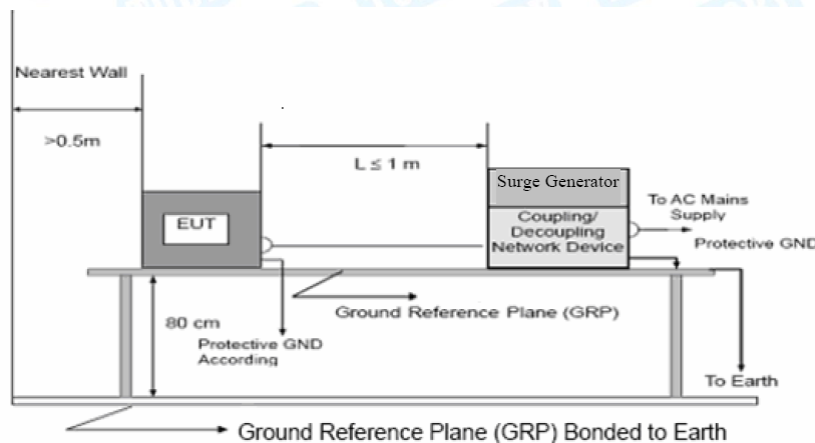

12.3 Test Procedure

12.3.1 Set up the EUT and test generator.

12.3.2 For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge

12.3.3 (at open-circuit condition) and 8/20us current surge to EUT selected points.

12.3.4 At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

12.3.5 Different phase angles are done individually.

12.3.6 Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.4 Deviation From Test Standard

No deviation

12.5 Test Data

Please refer to the Attachment F.

13RF Common Mode

13.1 Test Requirements

13.1.1 Test Standard

ETSI EN 301 489-1 Clause 9.5
ETSI EN 301 489-3
EN 61000-4-6


13.1.2 Test Level

Test Level for RF Common Mode

Port	Test Specification
Input AC power port	0.15MHz~80MHz 3V(r.m.s.) (unmodulated)

13.1.3 Performance criterion: A

13.2 Test Setup

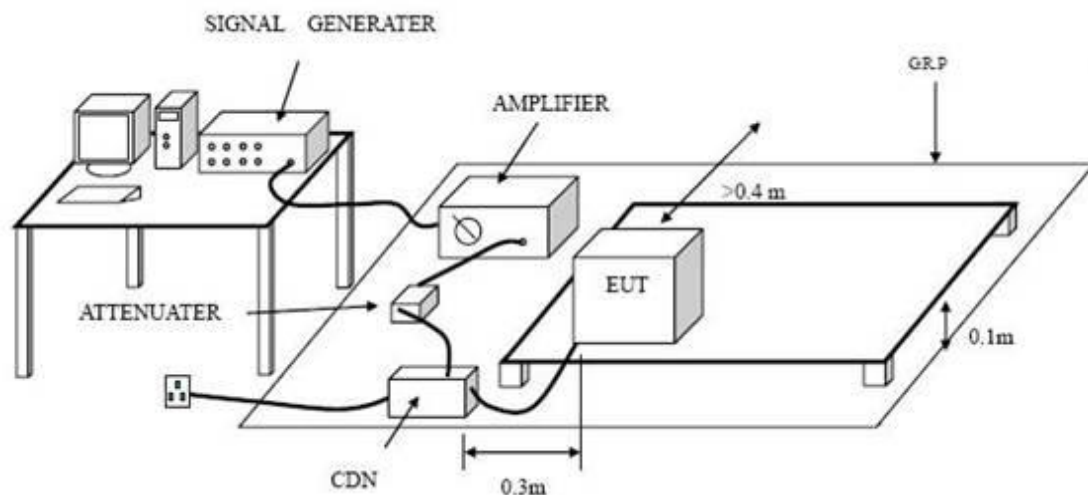

13.3 Test Procedure

13.3.1 Set up the EUT, CDN and test generators.

13.3.2 Let the EUT work in test mode and test it.

13.3.3 The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).

13.3.4 The disturbance signal description below is injected to EUT through CDN.

13.3.5 The EUT operates within its operational mode(s) under intended climatic conditions after power on.

13.3.6 The frequency range is swept from 0.150MHz to 230MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.

13.3.7 The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

13.3.8 Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.4 Deviation From Test Standard

No deviation

13.5 Test Data

Please refer to the Attachment G.

14 Voltage Dips and Interruptions Immunity Test

14.1 Test Requirements

14.1.1 Test Standard


ETSI EN 301 489-1 Clause 9.7
ETSI EN 301 489-3
EN 61000-4-11

14.1.2 Level

Test Level for Voltage Dips and Interruptions

Basic Standard:	EN 61000-4-11
Required Performance:	B(For 100% Voltage Dips) B(For 100% Voltage Dips) C(For 30% Voltage Dips) C(For 100% Voltage Interruptions)
Test Duration Time:	Minimum three test events in sequence
Interval Between Event:	Minimum ten seconds
Phase Angle:	0°/45°/90°/135°/180°/225°/270°/315°/360°
Test Cycle:	3 times

14.2 Test Setup

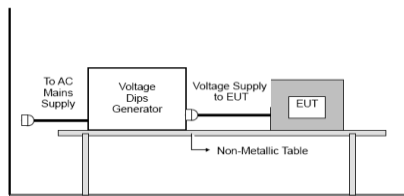

14.3 Test Procedure

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

14.4 Deviation From Test Standard

No deviation

14.5 Test Data

Please refer to the Attachment H.

15Photographs - Constructional Details

Photo 1 Appearance of EUT



Photo 2 Appearance of EUT



Photo 2 Appearance of PCB


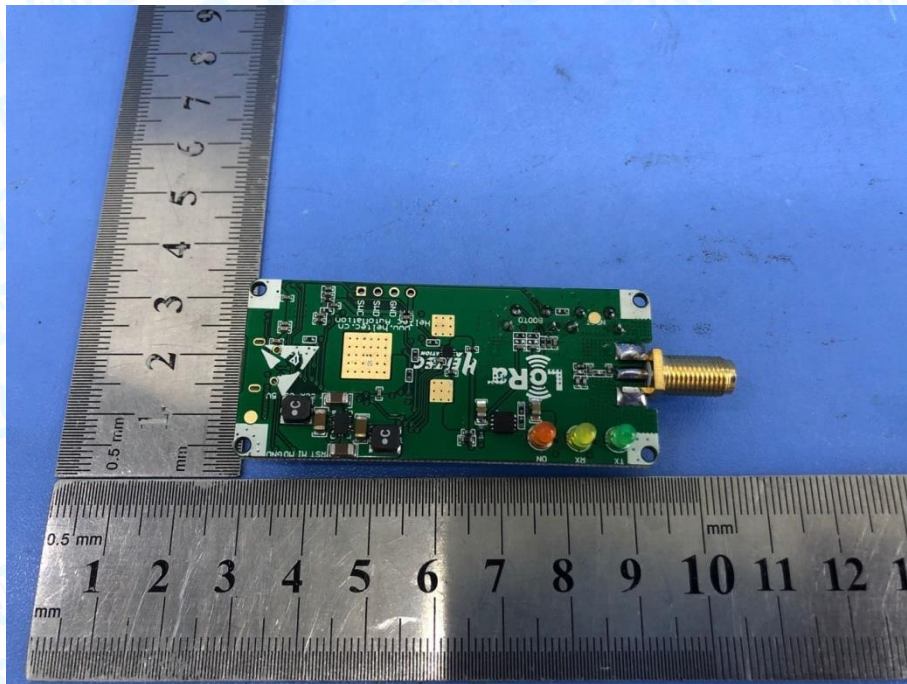


Photo 4 Appearance of PCB



16 Photographs – Test Setup

Conducted Emission Test Setup

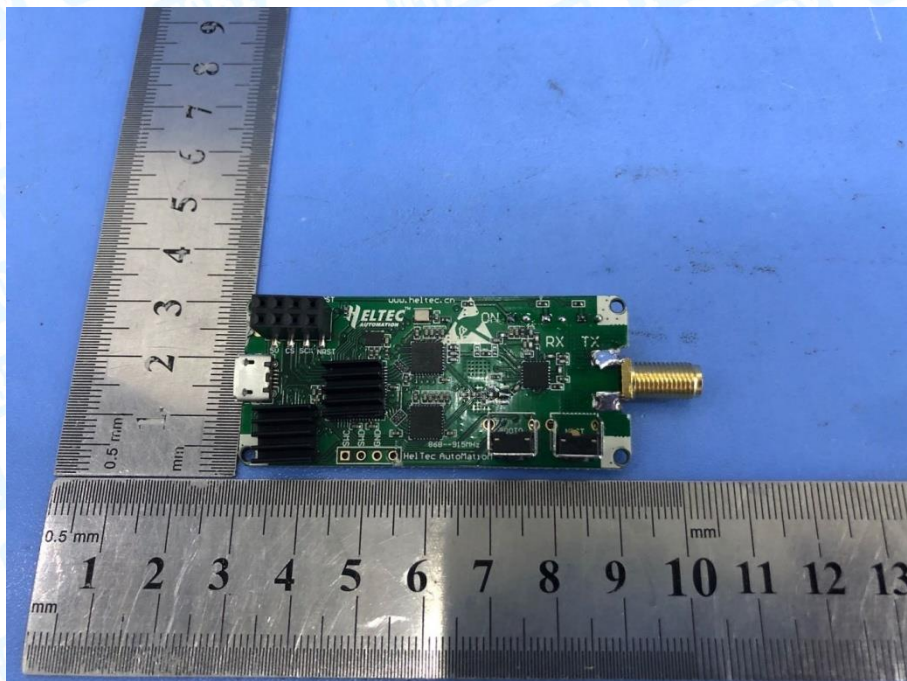


Radiation Test Setup



Electrostatic Discharge Test Setup



Injection Current Test Setup

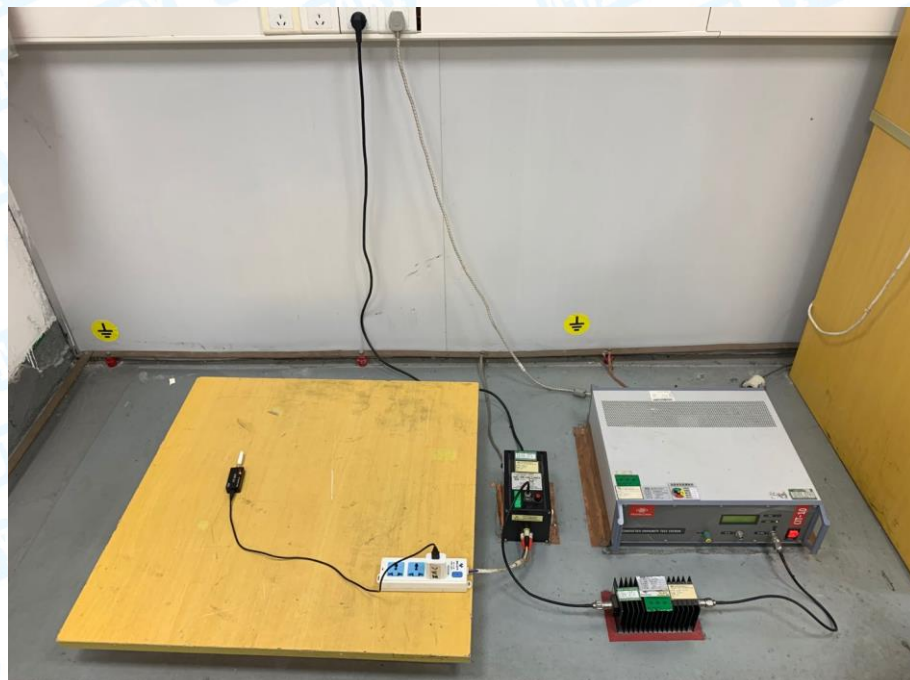


EFT, Surge, Voltage Dips Test Setup




Attachment A--Conducted Emission Data

Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010 hPa		
Test Voltage:	AC 230V/50Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only showed the worst mode test data.		

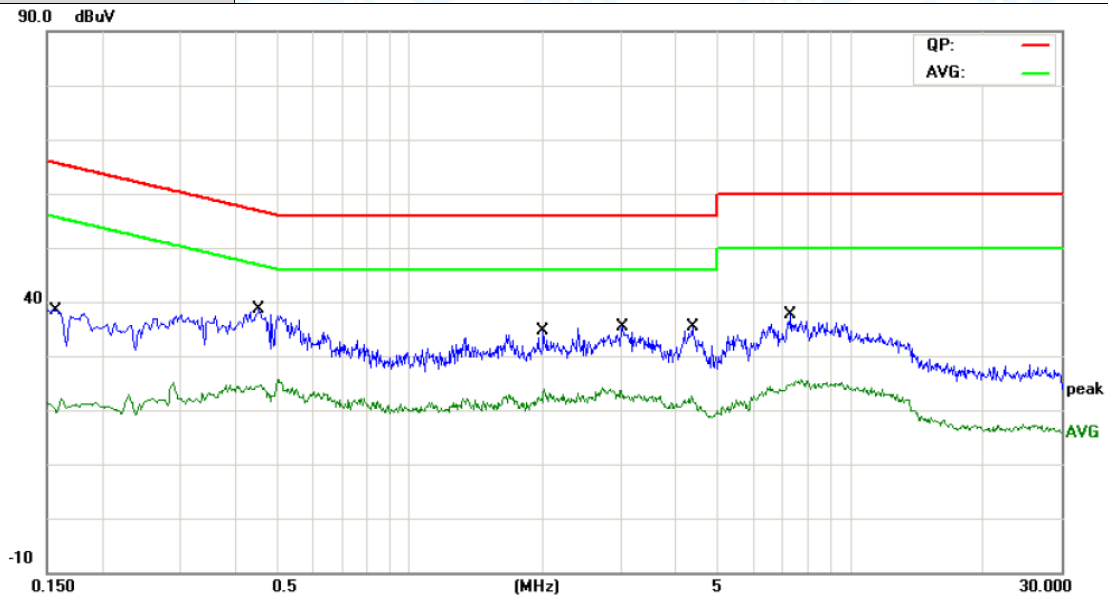


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1590	21.15	9.70	30.85	65.51	-34.66	QP
2		0.1590	8.08	9.70	17.78	55.51	-37.73	AVG
3		0.3379	15.97	9.70	25.67	59.25	-33.58	QP
4		0.3379	7.09	9.70	16.79	49.25	-32.46	AVG
5		0.4540	16.22	9.70	25.92	56.80	-30.88	QP
6	*	0.4540	7.48	9.70	17.18	46.80	-29.62	AVG
7		2.0100	10.44	9.70	20.14	56.00	-35.86	QP
8		2.0100	5.80	9.70	15.50	46.00	-30.50	AVG
9		4.3659	12.56	9.90	22.46	56.00	-33.54	QP
10		4.3659	6.04	9.90	15.94	46.00	-30.06	AVG
11		7.3060	10.56	9.80	20.36	60.00	-39.64	QP
12		7.3060	5.60	9.80	15.40	50.00	-34.60	AVG


Emission Level= Read Level+ Correct Factor

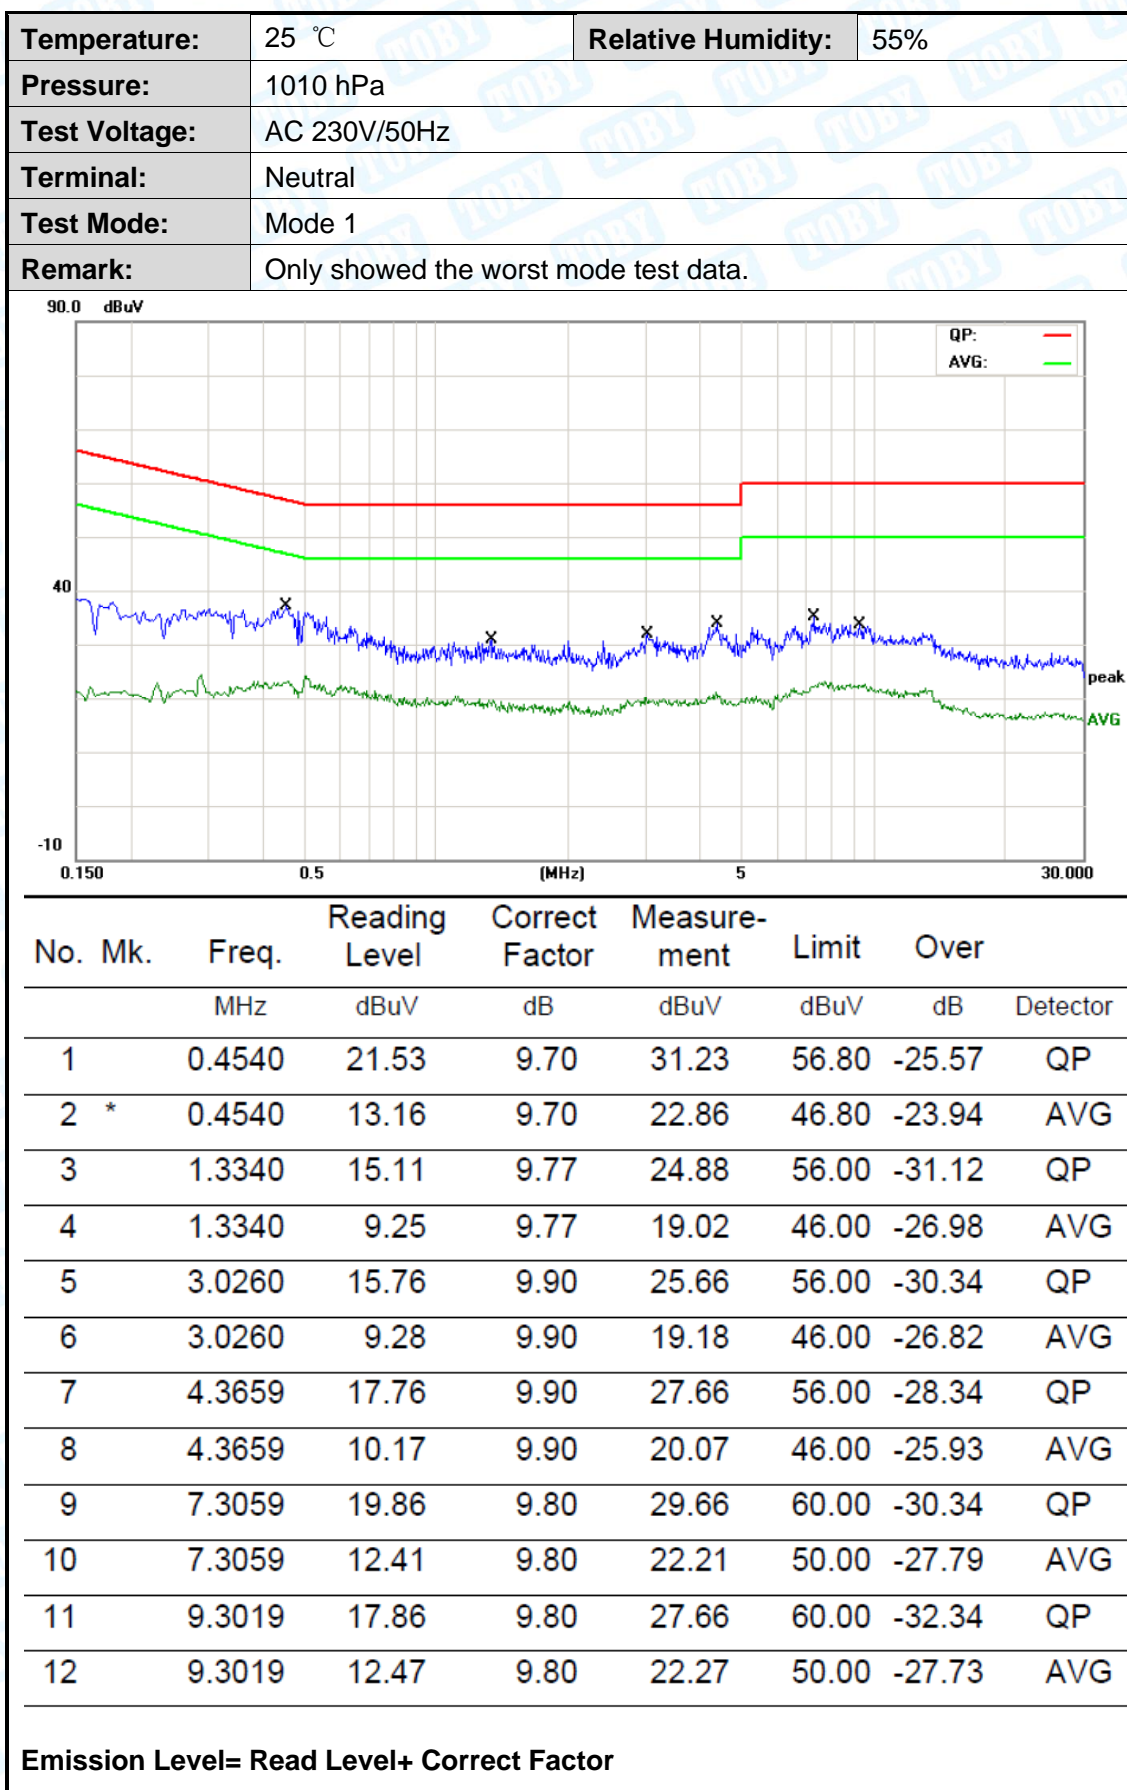

Attachment B--Radiated Emission Test Data


-----Below 1G

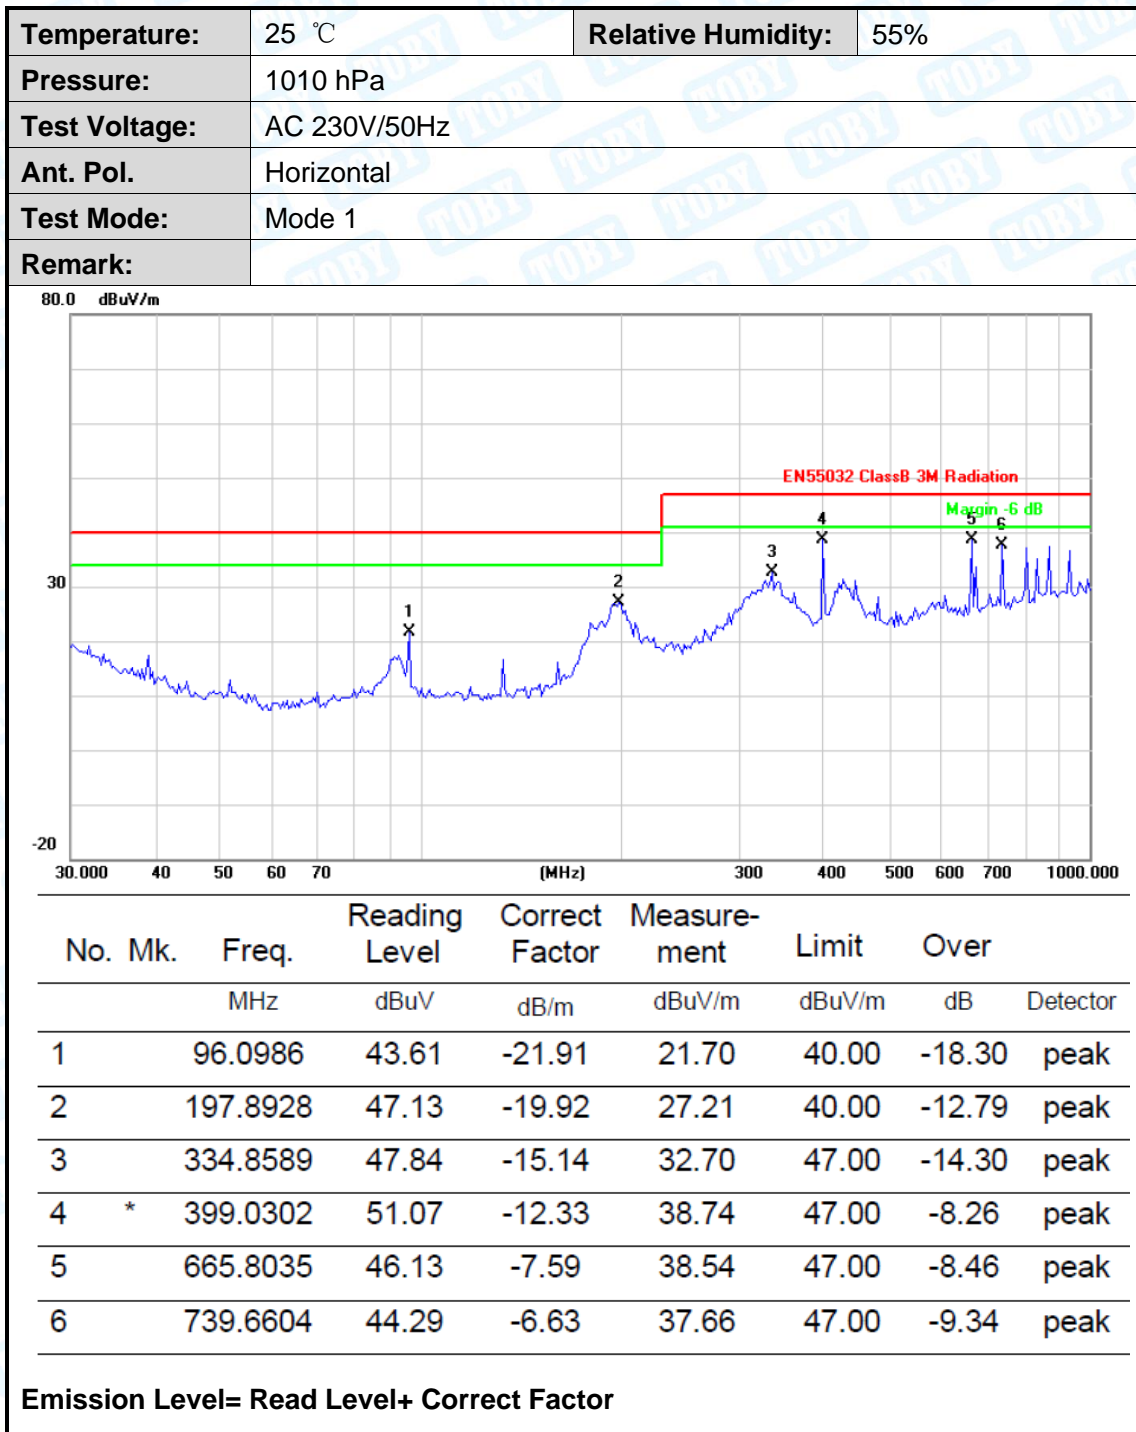

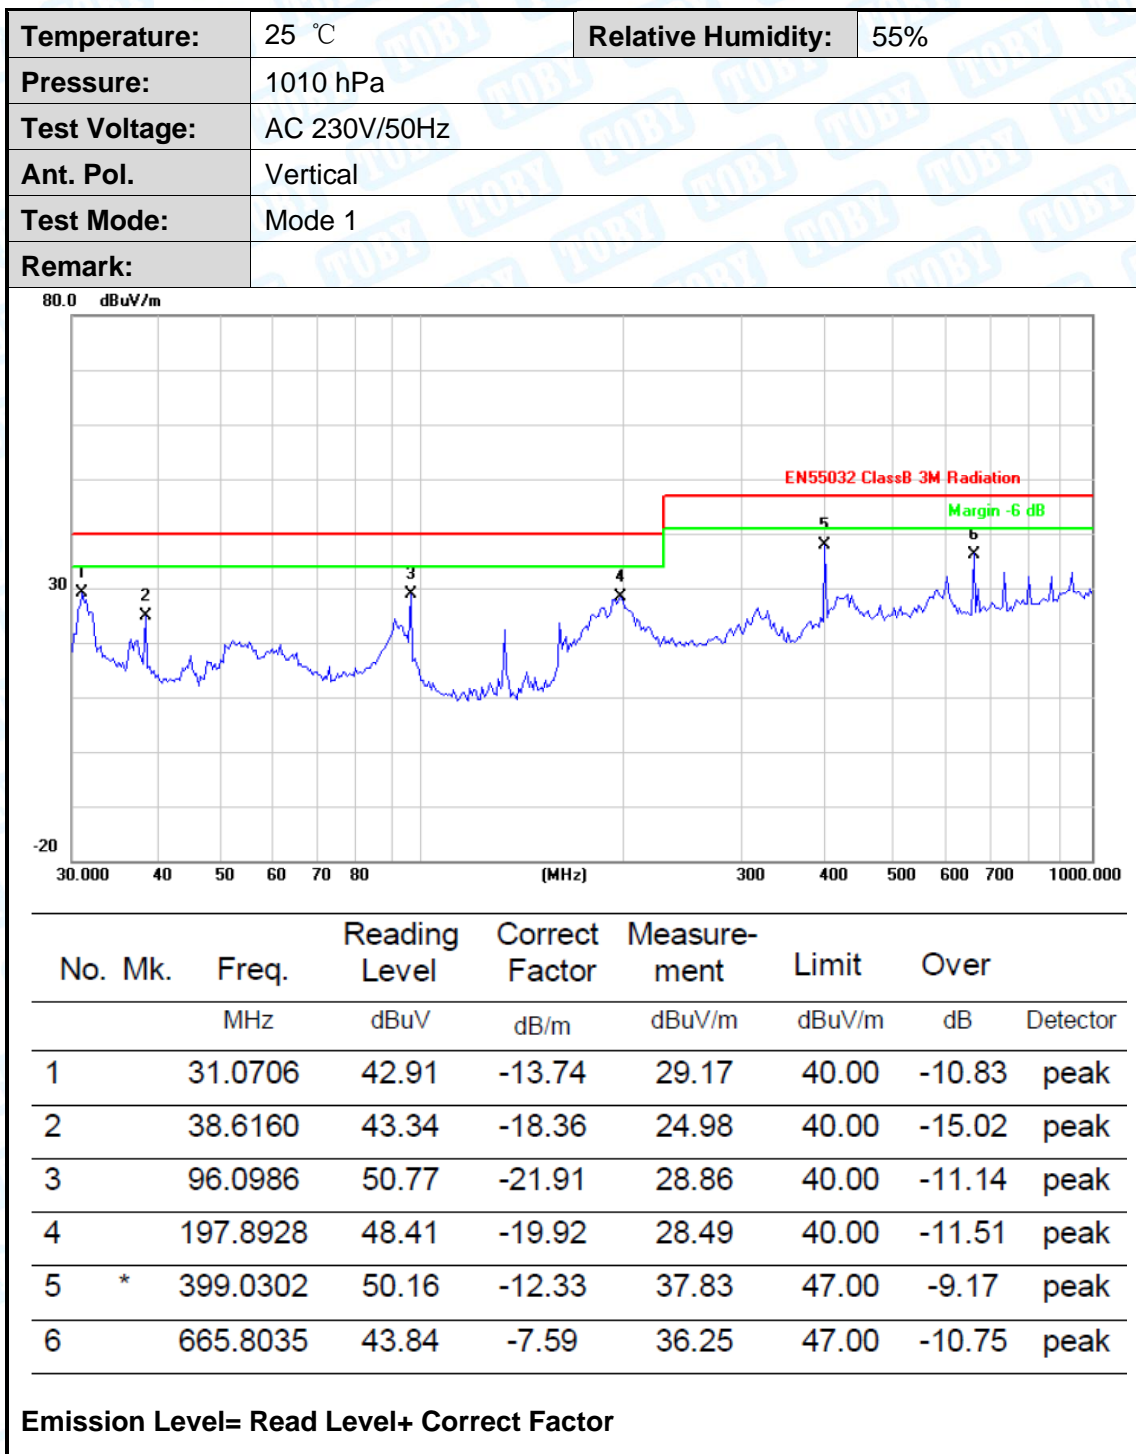

-----Above 1G


Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010 hPa		
Test Voltage:	DC 5V		
Ant. Pol.	Horizontal		
Test Mode:	Mode 1		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

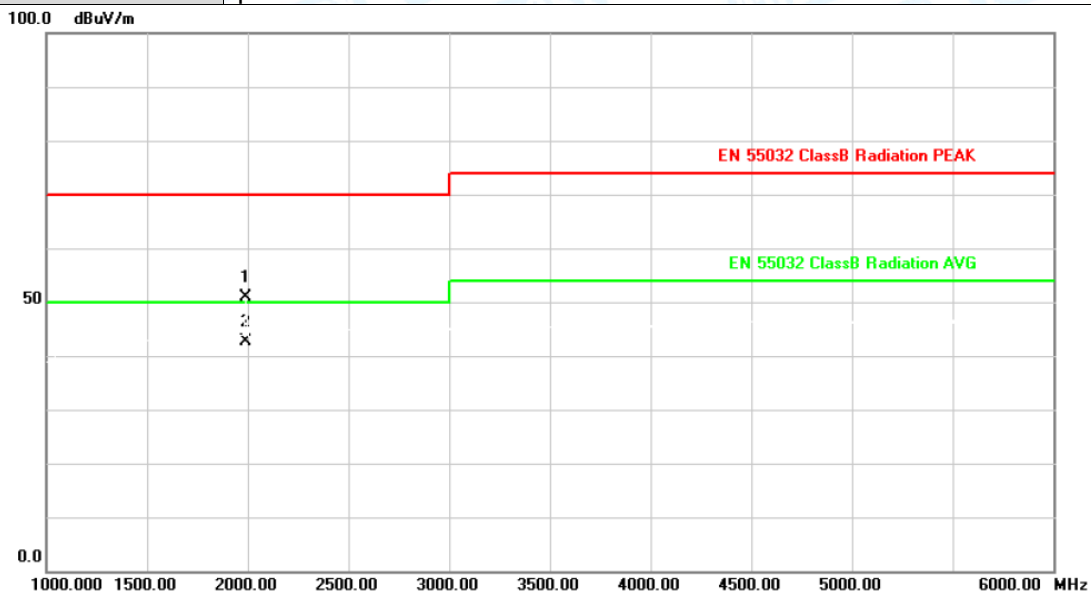

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		1990.000	51.96	-1.07	50.89	70.00	-19.11	peak
2	*	1990.000	43.63	-1.07	42.56	50.00	-7.44	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25 °C	Relative Humidity:	55%
Pressure:	1010 hPa		
Test Voltage:	DC 5V		
Ant. Pol.	Vertical		
Test Mode:	Mode 1		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

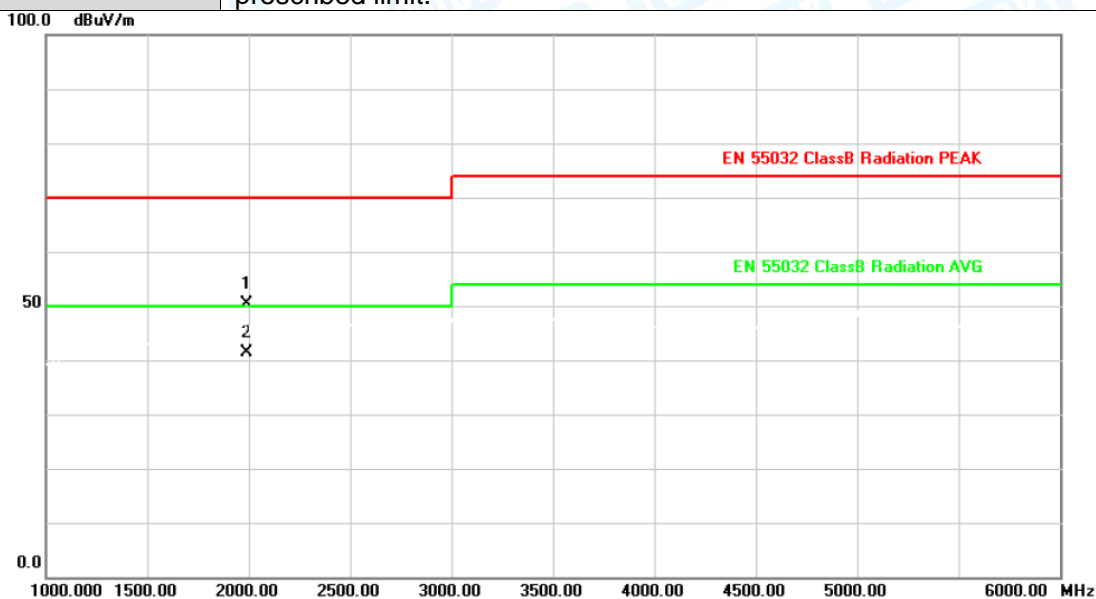

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector
1		1990.000	51.34	-1.07	50.27	70.00	-19.73	peak
2	*	1990.000	42.52	-1.07	41.45	50.00	-8.55	AVG


Emission Level= Read Level+ Correct Factor

Attachment C--Electrostatic Discharge Test Data

Temperature:	23.5°C	Humidity :	45%
Power Supply:	DC 5V	Test Mode :	Mode 1
Air Discharge: $\pm 2\text{kV}/\pm 4\text{kV}/\pm 8\text{kV}$ Contact Discharge: $\pm 2\text{kV}/\pm 4\text{kV}$ For each point positive 10 times and negative 10 times discharge.			
Location	Test Level (kV)	Result	Judgment
/	$\pm 2\text{kV}$ $\pm 4\text{kV}$ $\pm 8\text{kV}$	/	/
C1	$\pm 2\text{kV}/\pm 4\text{kV}$	A	PASS
C2		A	PASS
C3		A	PASS
C4		A	PASS
HCP	$\pm 4\text{kV}$	A	PASS
VCP	$\pm 4\text{kV}$	A	PASS
Note: "/" Representative the test not applicable.			

Test Location Photos

C1

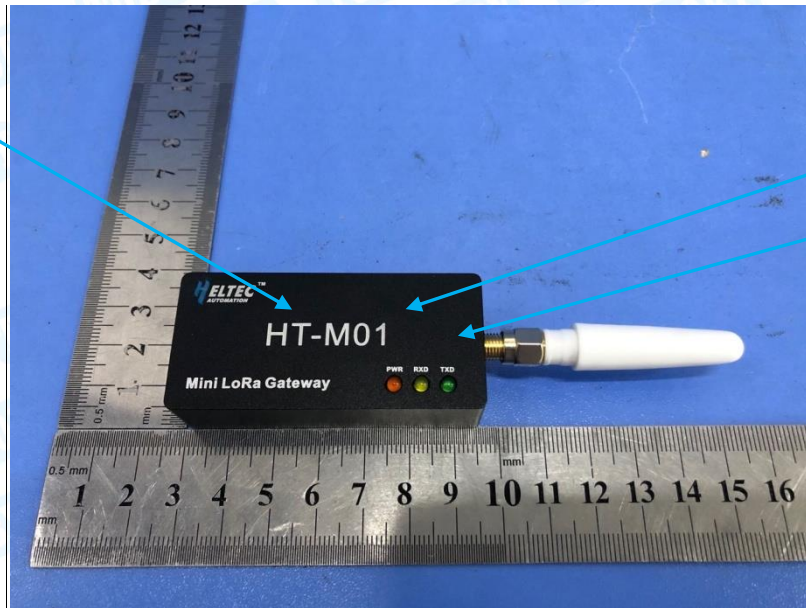

C2



Note:

Criteria A: There was no change operated with initial operating during the test.

Criteria B: The EUT function loss during the test, but self-recoverable after the test.

Criteria C: The system shut down during the test.

Attachment D--RF Field Strength Susceptibility Test Data

Temperature : 23.5°C Humidity : 45%

Power supply : DC 5V Test Mode : Mode 1

Required Performance Criteria: A

Modulation: AM 80%

Pulse: 1 kHz

EUT Position	Actual Performance Criteria				Judgment
	Frequency Range 1: 80~1000MHz		FrequencyRange2: 1000~6000MHz		
	Horizontal	Vertical	Horizontal	Vertical	
Front	A	A	A	A	PASS
Right	A	A	A	A	PASS
Rear	A	A	A	A	PASS
Left	A	A	A	A	PASS

Note:

Criteria A: There was no change operated with initial operating during the test.

Criteria B: The EUT function loss during the test, but self-recoverable after the test.

Criteria C: The system shut down during the test.

Attachment E--Electrical Fast Transient/Burst Test Data

Temperature : 23.5°C Humidity : 45%

Power supply : AC 230V/50Hz Test Mode : Mode 1

Required Performance Criteria: B

Line : ☒ AC Mains Coupling : ☒ Direct

Line : ☐ Signal ☐ I/O Cable Coupling : ☐ Capacitive

Line		Voltage(kV)	Required Performance Criteria		Actual Performance Criteria		Judgment
			(+)	(-)	(+)	(-)	
AC LINE	L	1.0	B	B	A	A	PASS
	N	1.0	B	B	A	A	PASS
	L-N	1.0	B	B	A	A	PASS
	L-PE	1.0	/	/	/	/	/
	N-PE	1.0	/	/	/	/	/
	L-N-PE	1.0	/	/	/	/	/
DC LINE		/	/	/	/	/	/
Signal Line		/	/	/	/	/	/

Remark:

Criteria A: There was no change operated with initial operating during the test.

Criteria B: The EUT function loss during the test, but self-recoverable after the test.

Criteria C: The system shut down during the test.

Attachment F-Surge Immunity Test Data

Temperature : 23.5°C

Humidity : 45%

Power supply : AC 230V/50Hz

Test Mode : Mode 1

Required Performance Criteria: B

Injected Line	Voltage (kV)	Phase	Actual Performance Criteria		Result	
			(+)	(-)	(+)	(-)
L-N	1.0	0°	A	A	PASS	PASS
		90°	A	A	PASS	PASS
		180°	A	A	PASS	PASS
		270°	A	A	PASS	PASS
L/N-PE	2.0	0°	/	/	/	/
		90°	/	/	/	/
		180°	/	/	/	/
		270°	/	/	/	/
L-N-PE	2.0	0°	/	/	/	/
		90°	/	/	/	/
		180°	/	/	/	/
		270°	/	/	/	/
Signal Line	1.0	+/-	/	/	/	/

Remark:

Criteria A: There was no change operated with initial operating during the test.

Criteria B: The EUT function loss during the test, but self-recoverable after the test.

Criteria C: The system shut down during the test.

Attachment G--Conducted Immunity Test Data

Temperature	: 23.5℃	Humidity	: 45%		
Power supply	: AC 230V/50Hz	Test Mode	: Mode 1		
Required Performance Criteria: A					
Frequency Range (MHz)	Injected Position	Voltage Level (e.m.f.)	Required Performance Criteria	Actual Performance Criteria	Result
0.15 ~ 80	AC Mains	3V(rms), AM 80% Modulated with 1 kHz	A	A	PASS
0.15 ~ 80	DC Mains	3V(rms), AM 80% Modulated with 1 kHz	A	/	/
0.15 ~ 80	Signal Line	3V(rms), AM 80% Modulated with 1 kHz	A	/	/
Remark:					
Criteria A: There was no change operated with initial operating during the test.					
Criteria B: The EUT function loss during the test, but self-recoverable after the test.					
Criteria C: The system shut down during the test.					

Attachment H--Voltage Dips and Interruptions Test Data

Temperature :	23.5℃	Humidity :	45 %
Power Supply :	AC 230V/50Hz	Test Mode :	Mode 1
Required Performance Criteria: B&C			
Test Results Description			
Voltage Reduction	Cycles	Perform Criteria	Judgment
Voltage dip 100%	0.5	B	PASS
Voltage dip 100%	1	B	PASS
Voltage dip 30%	25	C	PASS
Voltage Interruption100%	250	C	PASS
Remark: Criteria A: There was no change operated with initial operating during the test. Criteria B: The EUT function loss during the test, but self-recoverable after the test. Criteria C: The system shut down during the test.			

-----END OF REPORT-----