



Wireless Bridge Upload Firmware


1. Open the software, select ESP32, Develop, and click OK

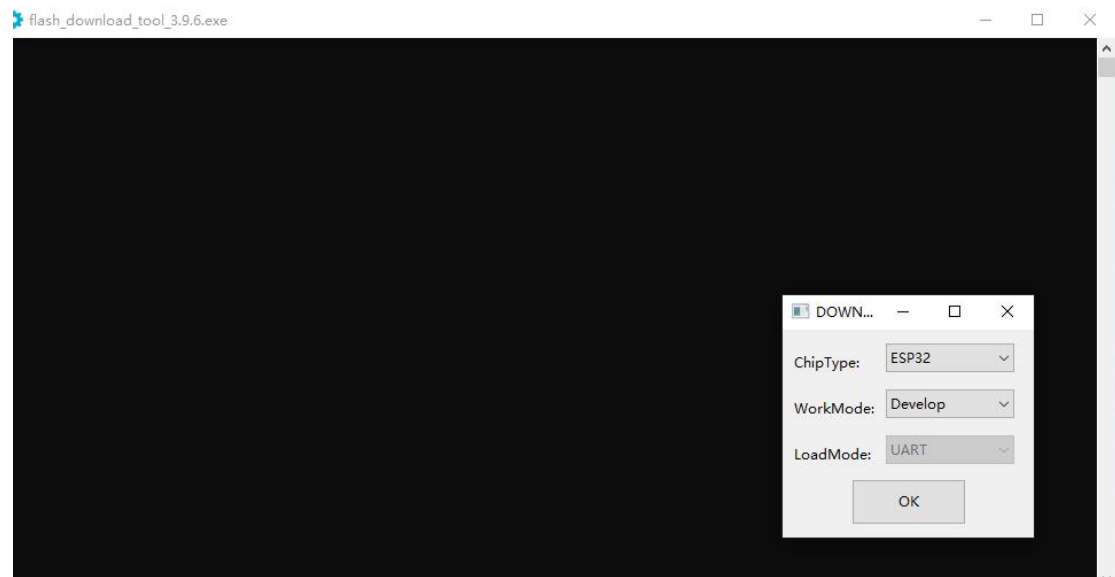

2. Click on the location shown in the arrow to select the previously downloaded firmware

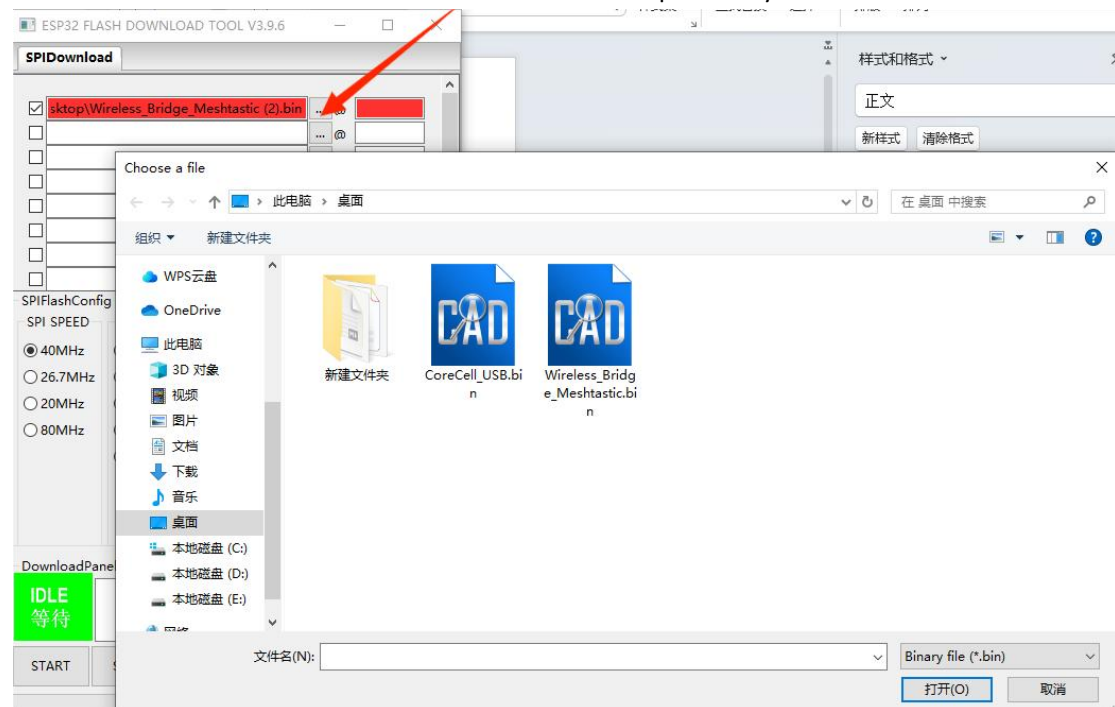

3. Select the corresponding COM with baud rate of 115200 and click START to start the burning process.

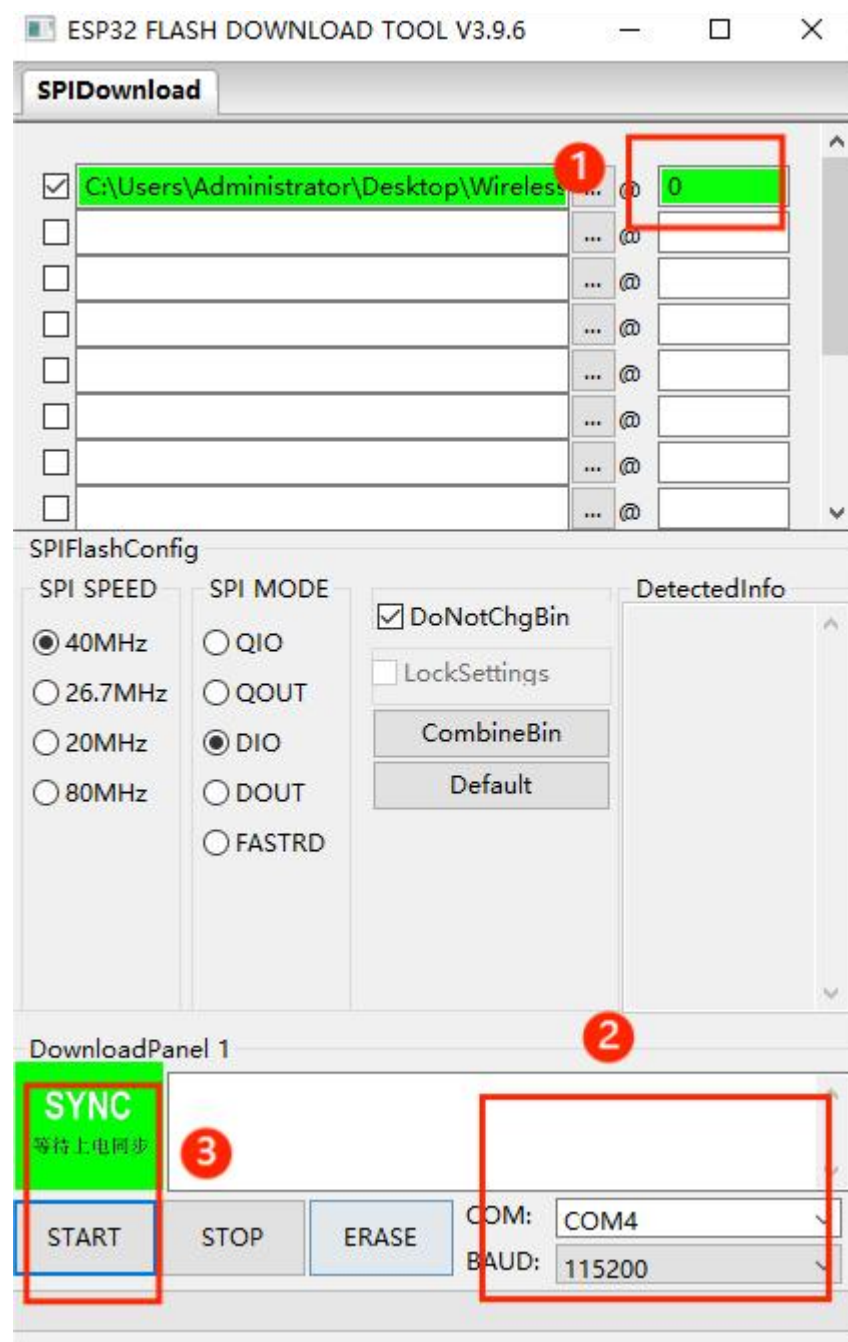

4. After successful burning, press the RST key of the device.